


GES9 service outlet with installation housing

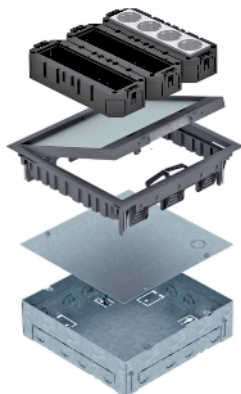

Square installation for twelve Modul 45 installations devices for use in dry-care cavity and screed floors consisting of installation housing, service outlet GES9-2, three MT4/45 module supports and two double protective contact sockets 33°, in white.

Installation housing with pre-marked insertion openings for pipelines (M25), adjustable to the top edge of the screed. In the as-delivered state, the installation housing is closed with a blanking lid. After the screed work the service outlet can be installed in the mounting opening created.

Floor covering recess in the hinged cover pre-adjusted to 3, 5, 8 or 10 mm.

The minimum installation depth is 73 mm (incl. floor covering), the height-adjustment range + 30 mm.

Colour of the service outlet: Iron grey; RAL 7011

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME GES9 7011	Iron grey	1	357,500	7427420
UDHOME GES9 9011	Graphite black	1	357,500	7427422

PA Polyamide

Dimensions

