



L4001A



N4051M2A



N4001A

1. USE

Rocker or axial control device for lighting and other control.


2. RANGE

Designation	Ref. 1 module	Ref. 2 modules	Type of control	
			Rocker	Axial
1-way switch 1 P 16 AX 250 VAC	L4001N	L4001M2N	x	
	N4001N	N4001M2N	x	
	NT4001N	NT4001M2N	x	
	L4001A	L4001M2A	x	
	N4001A	N4001M2A	x	
	NT4001A	NT4001M2A	x	
	L4001/O		x	
	LN4001A		x	
	L4051A	L4051M2A		x
	N4051A	N4051M2A		x
NT4051A	NT4051M2A		x	

Index of colour:

L : Anthracite
N : White
NT : Tech

3. OVERALL DIMENSIONS (mm)

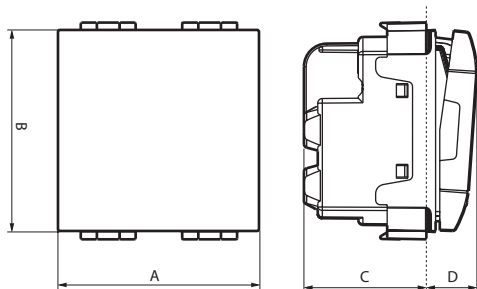

Rocker	A	B	C	D
1 module	21.8	43.8	25.5	11
2 modules	43.8	43.8	25.5	11

3. OVERALL DIMENSIONS (mm) (continued)

Axial	A	B	C	D
1 module	21.8	43.8	33.75	11
2 modules	43.8	43.8	28	11

4. CONNECTION

Automatic clamps.

Screw clamps for references: L/N/NT4001N
L4001/O

L/N/NT4001M2N

Stripping length (rigid or flexible cables): 12 mm for automatic clamps
9 mm for screw terminals.

5. TECHNICAL CHARACTERISTICS

■ 5.1 Protection index

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ 5.2 Material characteristics

Material: Polycarbonate for mechanism case
ABS for key cover

Colour: White, Tech, Anthracite

Halogen free.

UV resistant.

Self-extinguishing:

- 850° C / 30 s for insulating parts holding live parts in place.
- 650° C / 30 s for other parts made of insulating materials.

■ 5.3 Electrical characteristics

Voltage: 250 VAC

Current: 16 AX

■ 5.4 Climatic characteristics

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.
Refer to e.catalogue.